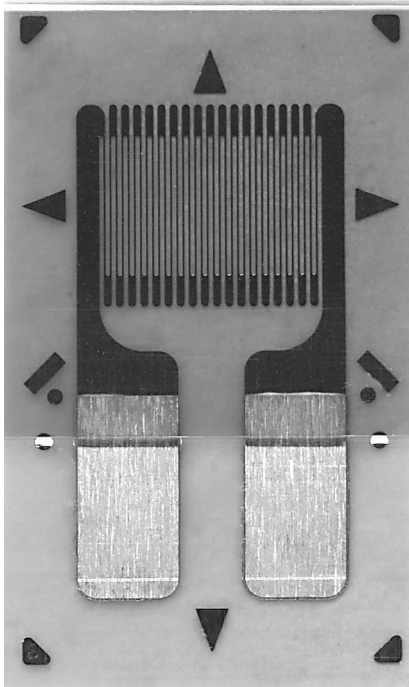


## General Purpose Strain Gages - Linear Pattern

GAGE PATTERN DATA					
 <p>actual size</p>			<b>GAGE DESIGNATION</b> See Note 1	<b>RESISTANCE (OHMS)</b>	<b>OPTIONS AVAILABLE</b> See Note 2
			CEA-XX-062UW-120 CEA-XX-062UW-350	120 ± 0.3% 350 ± 0.3%	<b>P2</b> <b>P2</b>
<b>DESCRIPTION</b> General-purpose gage. Exposed solder tab area is 0.07 x 0.04 in [1.8 x 1.0 mm].					
<b>GAGE DIMENSIONS</b>		Legend: ES = Each Section S = Section (S1 = Sec 1)		CP = Complete Pattern M = Matrix	
				<input type="checkbox"/> inch <input checked="" type="checkbox"/> millimeter	
<b>Gage Length</b>	<b>Overall Length</b>	<b>Grid Width</b>	<b>Overall Width</b>	<b>Matrix Length</b>	<b>Matrix Width</b>
0.062	0.220	0.120	0.120	0.31	0.19
1.57	5.59	3.05	3.05	7.9	4.8
GAGE SERIES DATA					
See Gage Series data sheet for complete specifications.					
Series	Description	Strain Range	Temperature Range		
CEA	Universal general-purpose strain gages.	±3%	-100° to +350°F [-75° to +175°C]		

**Note 1:** Insert desired S-T-C number in spaces marked XX.

**Note 2:** Products with designations and options shown in bold are not RoHS compliant.